
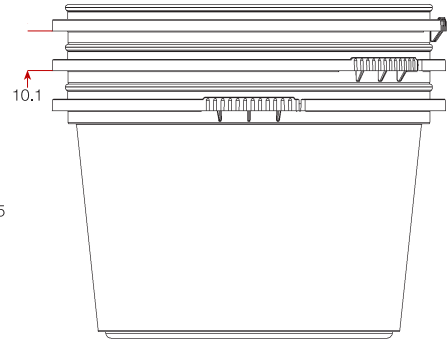



# Technical Data Sheet

## T123 - Tub, 300/93 MTE

### PRODUCT DIMENSIONS (mm)

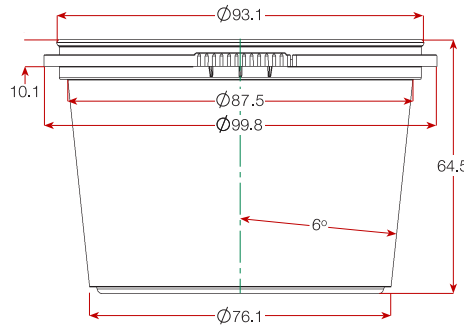

<b>SHAPE</b>	Round Conical			<b>TAMPER EVIDENCE</b>	Tamper evidence break-out tab.		
<b>LID OPTIONS</b>	<b>Lid</b>	<b>Closure type</b>	<b>Seal integrity</b>	<b>HANDLE</b>	Not available		
	L002 - 93 mm SAP	Plug-fit	High integrity	<b>HEIGHT (typical values)</b>	With lid L002	66.1 mm	
	L036 - 93 mm SL	Plug-fit	Medium integrity		With lid L036	64.9 mm	
	L098 - 93 mm Overlid	Overlid	Overlid		With lid L098	68.2 mm	
	L130 - 93 mm ROL	Overlid (raised)	Overlid		With lid L130	71.1 mm	
<b>VOLUME (typical values)</b>	<b>Brimfull</b>	332 ml	without any headspace	<b>WEIGHT (typical values)</b>	Tub	13.2 g	
	Underlid L002	305 ml	without any headspace		Lid L002	8.2 g	
	Underlid L036	302 ml	without any headspace		Lid L036	4.3 g	
	Underlid L098	332 ml	without any headspace		Lid L098	4.3 g	
	Underlid L130	332 ml	without any headspace		Lid L130	5.4 g	
<b>PACKING</b>	<b>No. per carton</b>	500		<b>South Island</b>	<b>North Island</b>		
	<b>Carton size</b>	510 mm L x 425 mm W x 335 mm H (0.073 m <sup>3</sup> )		30	18		
	<b>Carton weight when full</b>	9.0 kg +/- kg		15,000	9,000		
	<b>Carton liner</b>	Polypropylene (blue)		1100 mm x 1300 mm	1100 mm x 1300 mm		
	<b>Stack sleeve</b>	Polypropylene.		1.83 m	1.16 m		
	<b>Pallet Specifications</b>	<b>Export</b>		2.61 m <sup>3</sup>	2.61 m <sup>3</sup>		
	<b>Cartons per pallet</b>	24					
	<b>Quantity per pallet</b>	12,000					
	<b>Pallet dimensions</b>	1000 mm x 1200 mm					
	<b>Height including pallet</b>	2.16 m					
	<b>Cubic metres (incl. pallet)</b>	2.59 m <sup>3</sup>					
<b>RAW MATERIAL</b>		PP (polypropylene) All of Tecpak's products are made from plastic polymers in grades that are suitable for food packaging and comply with US regulations FDA Title21, CFR Part 177 1520 for Olefin Polymers and/or EU Directive 2002/72/EEL.					
<b>ENVIRONMENTAL</b>	The material used in this product is recyclable. Local authorities should be contacted for information on curbside collection.						
<b>COLOURS</b>	Natural, Clear, White. Other colours available on request.						
<b>DECORATION OPTIONS</b>	Dry offset printing (see separate printing specifications for this product). In Mould Labelling (see separate IML specifications for this product).						
<b>QUALITY</b>	Tecpak Industries Limited is certified to ISO9001:2000.						
<b>FOOD SAFETY</b>	Tecpak Industries Limited is certified to ISO22000:2005 Food Safety Management Systems.						
<b>PERFORMANCE</b>	<p><b>Hot Filling</b> The maximum fill temperature is 85°-95° C. Internal process trials should be undertaken to determine the viability of this product for the intended use.</p> <p><b>Freezing</b> The standard resin used for natural, white and coloured products will resist temperatures down to -20°C. Deep freezing below this temperature may require a special resin available on request. The standard resin used for clear products may become brittle at temperatures below 0° C. Internal process trials should be undertaken to determine the viability of this product for the intended use.</p> <p><b>Re-heating</b> This product may be microwaved. Internal process trials should be undertaken to determine the viability of this product for the intended use.</p> <p><b>Shelf Life</b> The compliance of the product to the technical specifications in this data sheet is guaranteed for 12 months after the date of delivery subject to suitable storage.</p> <p><b>Stacking (empty).</b> Ideally pallets should be stacked no more than two high.</p> <p><b>Stacking (full).</b> It is recommended that this product be packed into self supporting trays or cardboard boxes. Internal process trials should be undertaken to determine the viability of free-standing stacking and transportation.</p> <p><b>Other</b> Resins used are dishwasher safe and are designed for re-usability.</p> <p><b>In all cases internal trials should be undertaken to determine the suitability of the packaging through all stages of the process.</b></p>						