
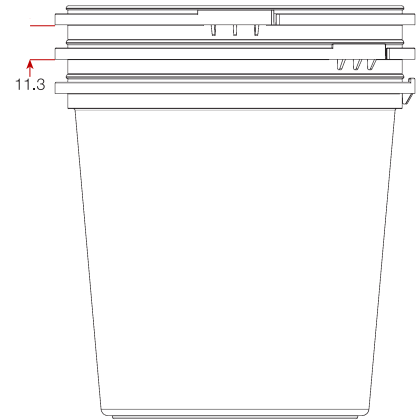
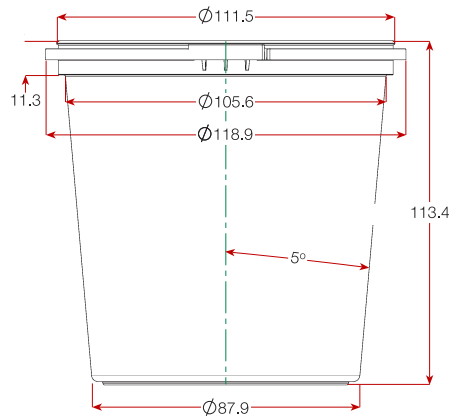



Technical Data Sheet

T059 - Tub, 750/111 MTE

PRODUCT DIMENSIONS (mm)

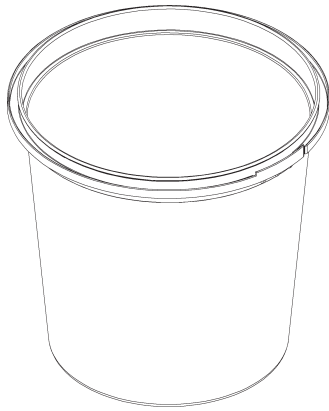

SHAPE	Round Conical			TAMPER EVIDENCE	Tamper evidence break-out tab.		
LID OPTIONS	Lid	Closure type	Seal integrity	HANDLE	Not available		
	L004 - 111 mm SL	Plug-fit	Medium integrity	HEIGHT (typical values)	With lid L004	114.0 mm	
	L009 - 111 mm HL	Overlid	Low integrity		With lid L009	114.1 mm	
	L089 - 111 mm Overlid	Overlid	Overlid		With lid L089	117.6 mm	
VOLUME (typical values)	Brimfull	810 ml	without any headspace	WEIGHT (typical values)	Tub	32.7 g	
	Underlid L004	770 ml	without any headspace		Lid L004	8.6 g	
	Underlid L009	768 ml	without any headspace		Lid L009	10.0 g	
	Underlid L089	810 ml	without any headspace		Lid L089	8.3 g	
PACKING	No. per carton	400					
	Carton size	495 mm L x 495 mm W x 405 mm H (0.099 m ³)					
	Carton weight when full	13.5 kg +/- kg					
	Carton liner	Polypropylene (blue)					
	Stack sleeve	Polypropylene.					
	Pallet Specifications	Export		South Island	North Island		
	Cartons per pallet	20		20	12		
	Quantity per pallet	8,000		8,000	4,800		
	Pallet dimensions	1000 mm x 1200 mm		1100 mm x 1060 mm	1100 mm x 1060 mm		
	Height including pallet	2.18 m		2.18 m	1.37 m		
	Cubic metres (incl. pallet)	2.61 m ³		2.54 m ³	1.59 m ³		
RAW MATERIAL		PP (polypropylene) All of Tecpak's products are made from plastic polymers in grades that are suitable for food packaging and comply with US regulations FDA Title21, CFR Part 177 1520 for Olefin Polymers and/or EU Directive 2002/72/EEL.					
ENVIRONMENTAL	The material used in this product is recyclable. Local authorities should be contacted for information on curbside collection.						
COLOURS	Natural, Clear, White. Other colours available on request.						
DECORATION OPTIONS	Dry offset printing (<i>see separate printing specifications for this product</i>).						
QUALITY	Tecpak Industries Limited is certified to ISO9001:2000.						
FOOD SAFETY	Tecpak Industries Limited is certified to ISO22000:2005 Food Safety Management Systems.						
PERFORMANCE	<p>Hot Filling The maximum fill temperature is 85°-95° C. Internal process trials should be undertaken to determine the viability of this product for the intended use.</p> <p>Freezing The standard resin used for natural, white and coloured products will resist temperatures down to -20°C. Deep freezing below this temperature may require a special resin available on request. The standard resin used for clear products may become brittle at temperatures below 0° C. Internal process trials should be undertaken to determine the viability of this product for the intended use.</p> <p>Re-heating This product may be microwaved. Internal process trials should be undertaken to determine the viability of this product for the intended use.</p> <p>Shelf Life The compliance of the product to the technical specifications in this data sheet is guaranteed for 12 months after the date of delivery subject to suitable storage.</p> <p>Stacking (empty). Ideally pallets should be stacked no more than two high.</p> <p>Stacking (full). It is recommended that this product be packed into self supporting trays or cardboard boxes. Internal process trials should be undertaken to determine the viability of free-standing stacking and transportation.</p> <p>Other Resins used are dishwasher safe and are designed for re-usability.</p> <p>In all cases internal trials should be undertaken to determine the suitability of the packaging through all stages of the process.</p>						